

Rotarylok & HOP Bulletin Sections

Rotarylok & HOP Tie-Down


If you are located in a high wind area you'll need to tie-down your sections to the angle iron stringers.

Use a 4" Hook Bolt/Flange Nut and a 3" "J" Clip (with 3" x 3" angle iron) on every section across the back.

You may want to do more than one row.

Drop the Hook Bolt through the hole in the Hanger. The "J" Clip goes under the angle iron stringer and the Hook Bolt through the "J" Clip. Tighten the Flange Nut and the sections are secured.

In a hurricane area use the Hurricane Bolt, Key and "J" Clip. Put the Hurricane Bolt through the hole in the hanger and put the Key through the slot. Attach the "J" Clip on the bottom and tighten the Flange Nut. When a hurricane is headed your way, simply knock out the Key with a hammer. This will allow the Bolt and "J" Clip to drop out of the way.

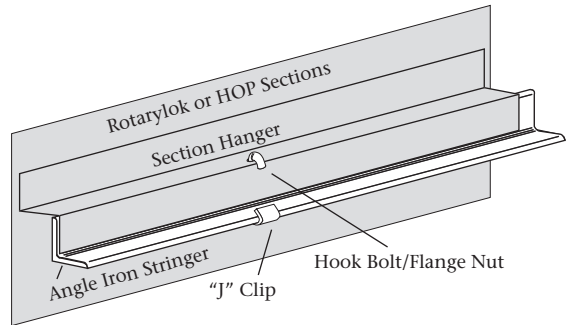

**Bulletin Sections Tie Down
Rotarylok and HOP Sections**

