BACKDROP KIT

INCREASE THE LIFE OF YOUR CLIENTS WRAPPED ADVERTISING VINYL



To increase the life of your clients wrapped advertising vinyl over a Formetco Direct to Pole or Panel Free Frame, we highly recommend using our optional Backdrop Vinyl Hardware Kit.

Designed to keep sunlight from showing through the main ad copy while also reducing the negative effects of wind pillowing, such as friction tears along the pole pockets which causes early blowouts. These kits are easy to install from the backside of the frame with a single bolt and nut. They also include 4" hook bolts and nuts for stretching the backdrop vinyl, no ratchet straps needed.


Features and Benefits

- Made of ¼" steel that is pre-punched and angle formed for strength
- Includes: (1) ½" x 1.5" Carriage Bolt, (1) ½" Serrated Flange Lock Nut, (1) Channel Nut, (1) 3/8" x 4" FX Hook Bolt, and (1) 3/8" Serrated Flange Lock Nut
- 2-inch gap between the outside ad vinyl and backdrop vinyl prevents moisture and mildew build up
- Backdrop vinyl size from pocket edge to pocket edge is 1-foot less than the outer dimension of the frame's height and width
- Top and bottom gripper bars require three pull points per bar up to 12', side gripper bars require 4 pull points per bar up to 14'
- Fiberglass Gripper Bars can be included if needed



BACKDROP KIT

INCREASE THE LIFE OF YOUR CLIENTS WRAPPED ADVERTISING VINYL

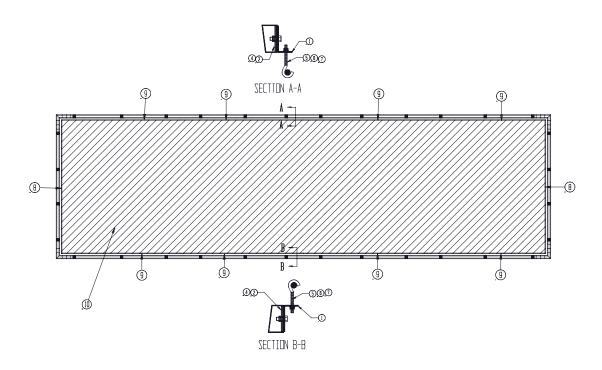

TOP AND BOTTOM GRIPPER BARS REQUIRE THREE PULL POINTS PER BAR SIDE GRIPPER BARS REQUIRE 4 PULL POINTS PER BAR

ITEL A NULL ABED	OLI A NITITY	D A DT A HILL ADED	DECODIDION
IIEW NOWREK	QUANIIIY	PART NUMBER	DESCRIPTION
1		TMP-1008126	CHANNEL BRACKET
2		TMP-1007039	CHANNEL NUT
3			
4			1/2-13 X 1 1/4" HEX HEAD CAP SCREW
5			3/8-16 X 4" GRIPPER BAR BOLT
6			FLAT WASHER
7			3/8-16 NYLON LOCK NUT
8			3/4" DIA. GRIPPER BAR
9			3/4" DIA. GRIPPER BAR
10		-	required vinyl size

PANEL-FREE BACKDROP VINYL SPECIFICATIONS

<u>VINYL AREA (LAID IN THE FLAT BEFORE FINISHING)</u> SUBTRACT 6" FROM TOTAL SIGN HEIGHT AND WIDTH

<u>OUTSIDE DIMENSIONS (OUTER POCKET EDGE TO OUTER POCKET EDGE)</u> SUBTRACT 12" FROM TOTAL SIGN HEIGHT AND WIDTH

COPY / VISIBLE AREA (OUTER POCKET EDGE TO OUTER POCKET EDGE) SUBTRACT 8" FROM TOTAL SIGN HEIGHT AND WIDTH

LIVE / ACTIVE / SAFE AREA (FOR TEXT & GRAPHICS) SUBTRACT 20" FROM TOTAL SIGN HEIGHT AND WIDTH

BLEED: FULL BLEED OF BACKGROUND COLORS TO BACKSIDE OF POCKETS FINISHING: 2" POLE POCKETS ALL SIDES MATERIAL WEIGHT: 12 OUNCE RECOMMENDED

UNESS OTHERWISE SPECFED
DIMENSIONS ARE IN INCIES
TOLERANCE!
ANGULAR BEND 1: 2"
ANGULAR BE